Modular restrictive valve

Technical specification



Specification		02	03
Max.pressure	(MPa)	31.5	
Max.flow	(L/min)	30	50
Hydraulic fluid		Mineral oil;phosphate-ester	
Fluid temp	(℃)	-20~70	
Viscosity	(mm^2/s)	2.8~380	
Cleanliness		The maximum allowable cleanliness of the oil should be according to 9th degree of Standard NAS1638.It is suggested that the minimum filter rating should be β 10≥75.	

Model instruction

DL-* * / * 70 *

Modular restrictive valve

Specification
02 NS 6
03 NS 10

P P Pipeline
T T Pipeline
A A Pipeline
B B Pipeline
AB AB Pipeline


Remarks

Serial number


Seal material
Omit NBR Seals
V FPM Seals

Code symbol


DL-*-A




DL-*-B




DL-*-P



DL-*-T




DL-*-W




Modular restrictive valve

External dimensions

DL-02-A/ ···

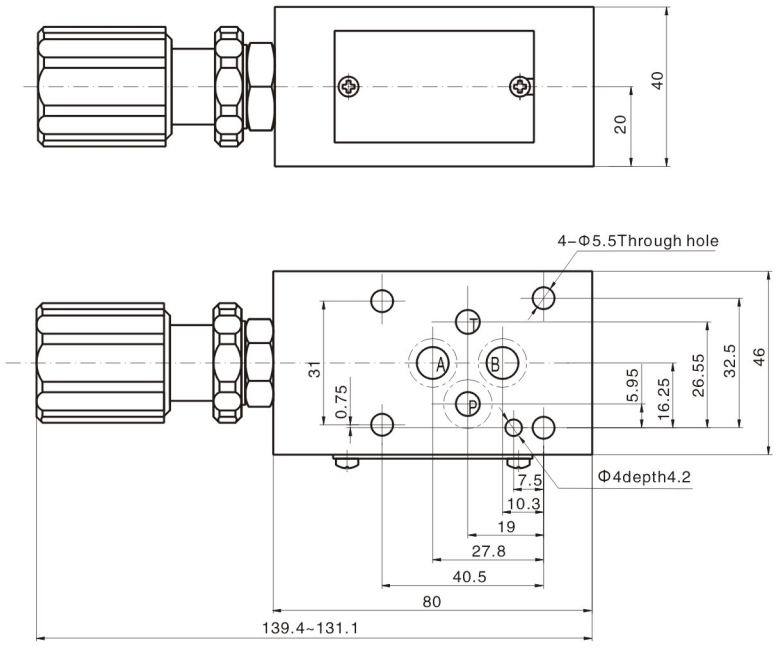

DL-02-P,B,T/ ···

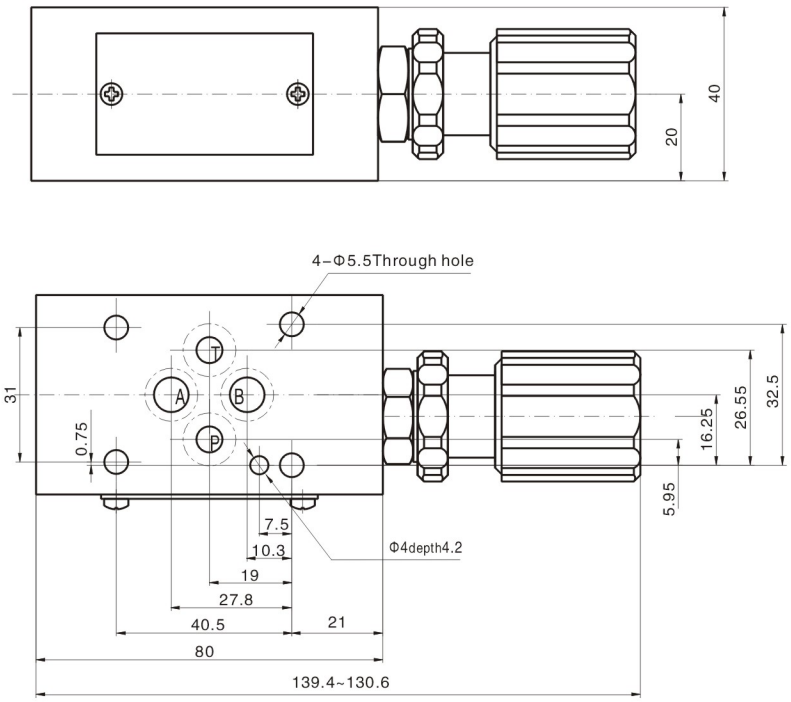


Notice：The surface, connecting with the valve, should be Ra0.8 roughness, and 0.01/100mm flatness.


Modular restrictive valve

External dimensions

DL–02–W/ ···

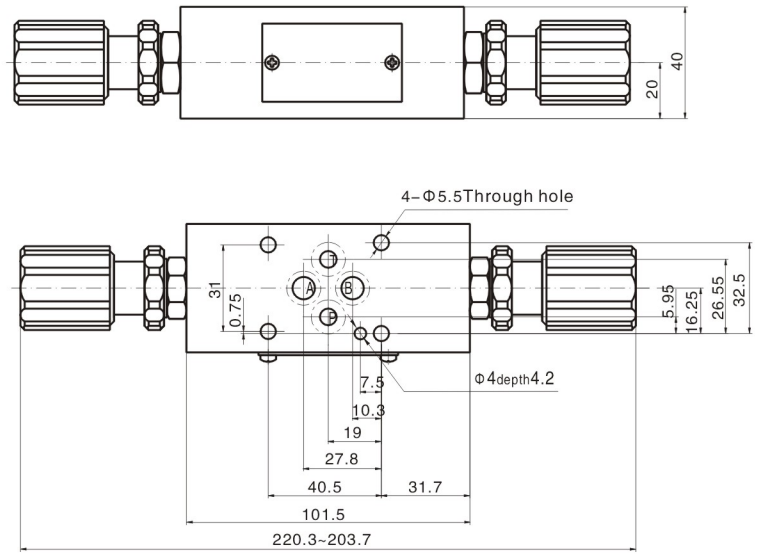


DL–03–A/ ···

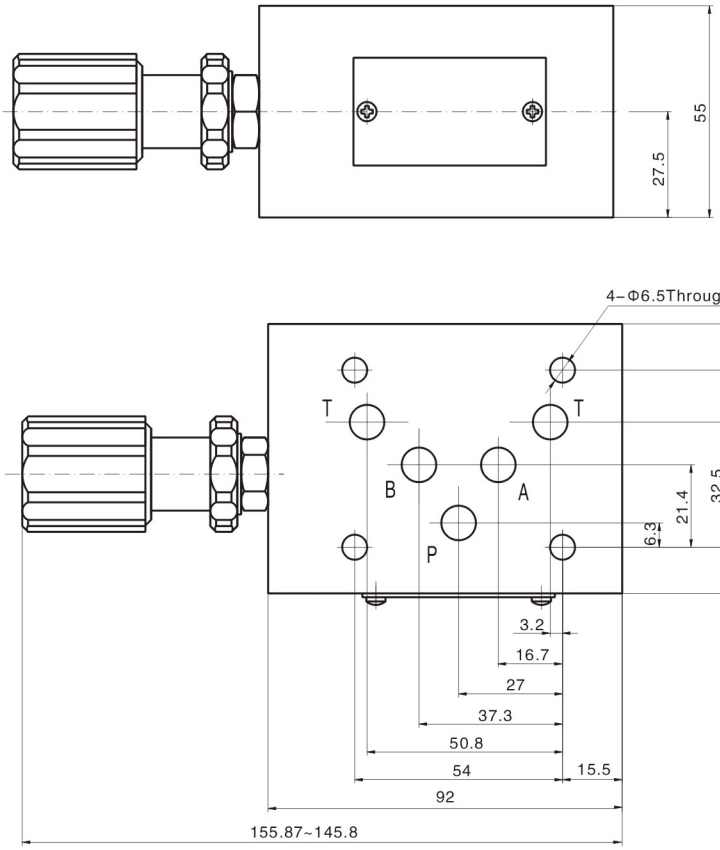


Notice：The surface, connecting with the valve, should be Ra0.8 roughness, and 0.01/100mm flatness.

External dimensions

DL–03–P,B,T/ ···

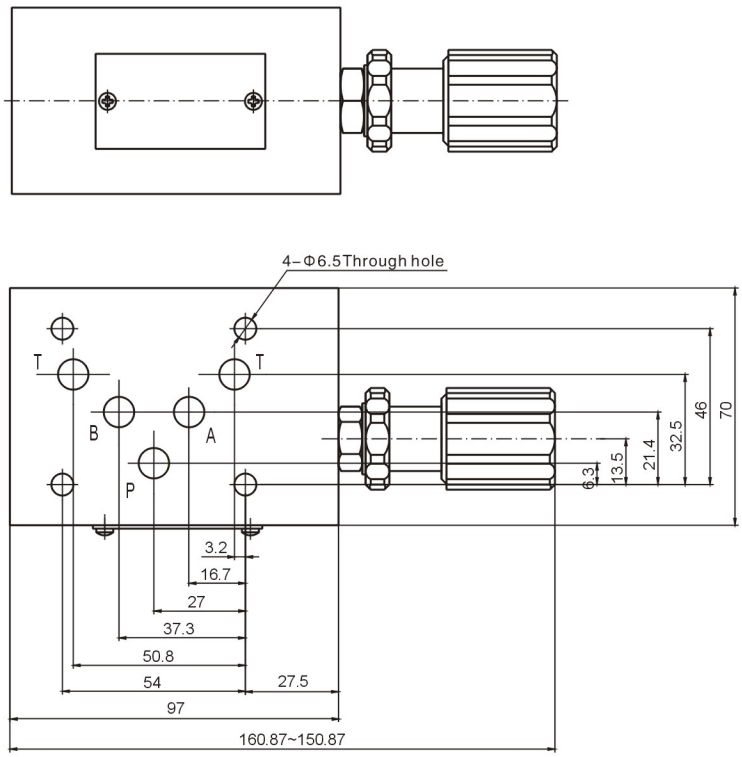

DL–03–W/ ···

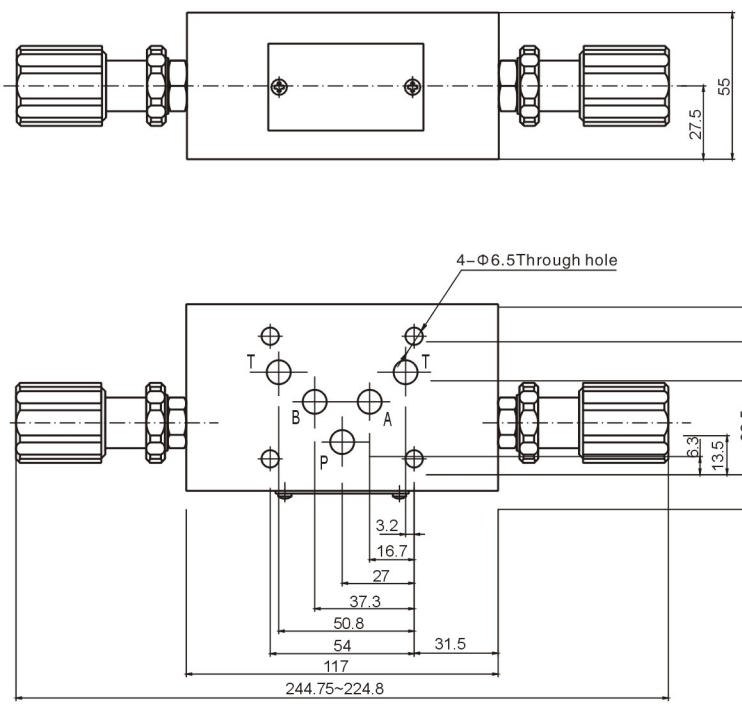

Notice：The surface, connecting with the valve, should be Ra0.8 roughness, and 0.01/100mm flatness.